


Features

- Surface lets manure pass through easily, remaining clean and comfortable for your birds.
- Anti-slip surface.
- Manufactured of polypropylene, making the slat extremely resistant to wear, differences in temperature and chemical agents.
- No tools required.
- Interlocking 2' x 3' slats make installation and removal very easy work.

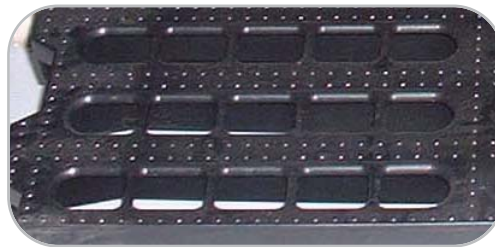

Technical Characteristics

- Material: Polypropylene
- Unitary Weight: Approximately 6.615 lbs.
- Treading Surface: 60%
- Colour: Available in Grey or Black



**NOTE: Poultry flooring is designed to support the weight of chickens.
Workers should walk only on supported areas of flooring.**

CANARM LTD. - Corporate Office
2157 Parkedale Ave., Brockville, ON
Canada K6V 5V6
Tel: (613) 342-5424 Fax: 1-800-263-4598

CANARM LTD. - USA Warehouse
808 Commerce Park Drive
Ogdensburg, New York, USA 13669
Tel: 1-800-267-4427 Fax: 1-800-263-4598
Web Site: www.canarm.com
E-Mail: agsales@canarm.ca

Arthur Manufacturing Facility
#7686 Concession 16, RR 4 Arthur, ON
Canada NOG 1A0
Tel: (519) 848-3910 Fax: (519) 848-3948




BLACK CHICKEN FLOOR




2099540

36" O.C. X 24" LG.

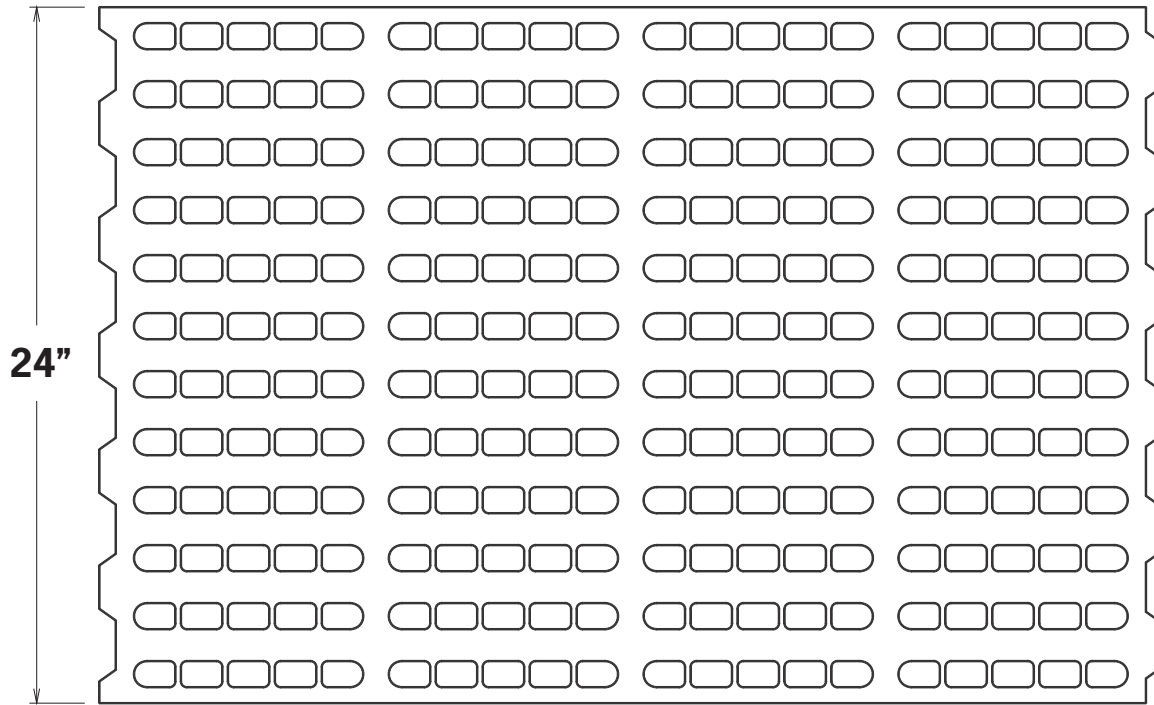

RIGHT END VIEW

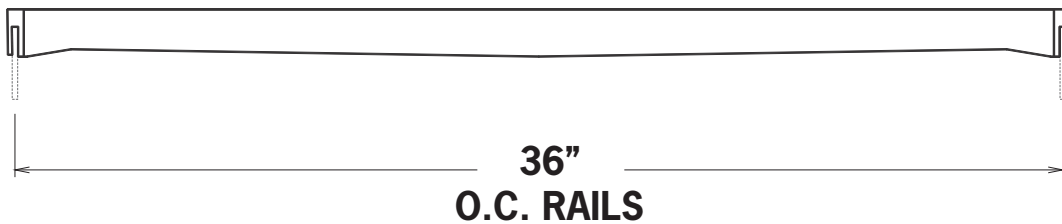

- Size installed (36" O.C.)(24" LG.)
- % Open (240 Slots @ .900" x 1.423"), therefore 36% open
- Top of support to top of floor = .600" (Overall height = 1.625")
- Therefore minimum support height = 2"




PLASTIC DUCK FLOOR




2099750D

24" O.C. X 18" LG.

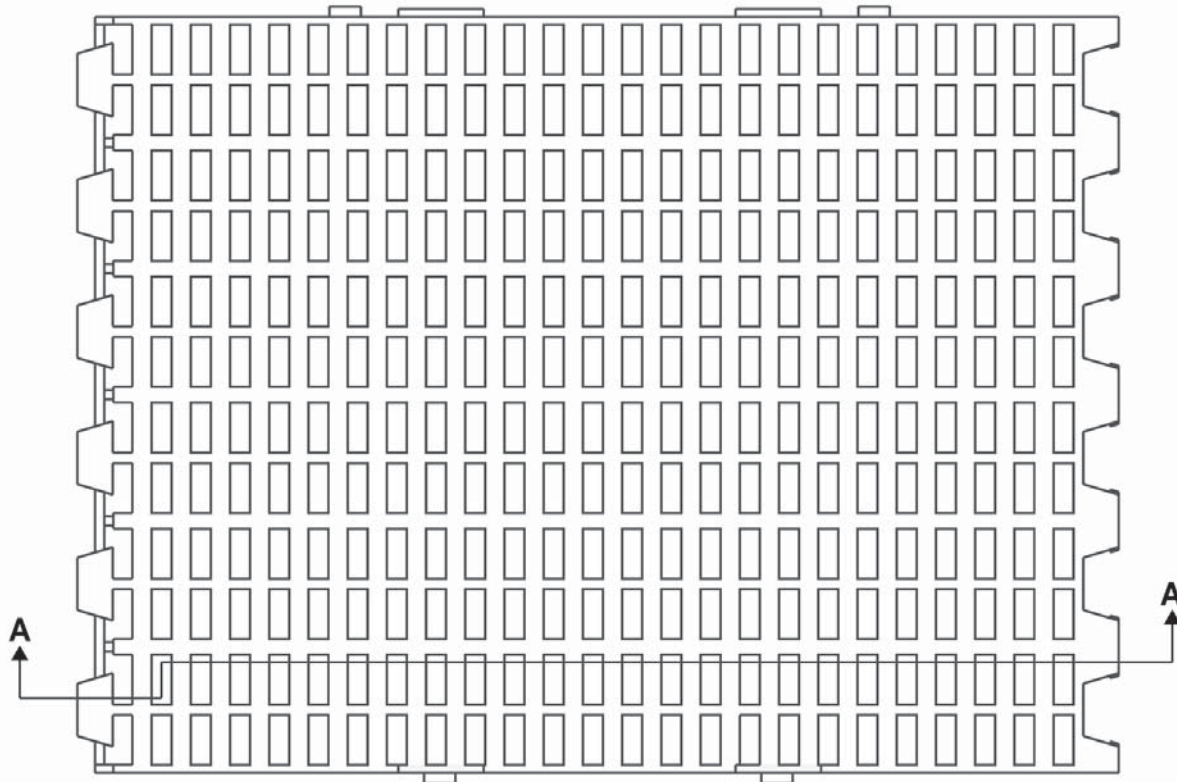

SECTION AA

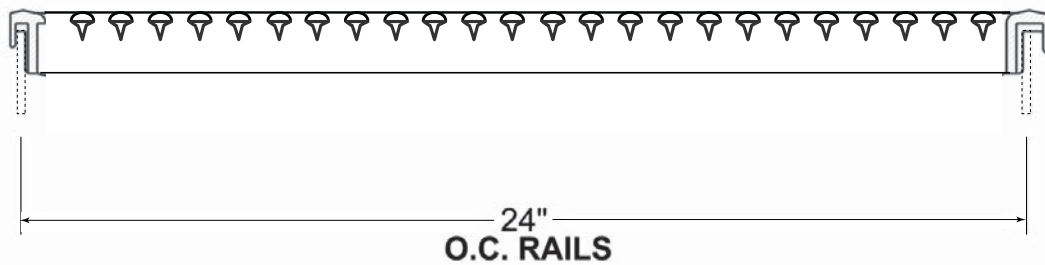

- Size installed (24" O.C.)(18" LG.)
- % Open (300 Slots @ .4766" x 1.1875"), therefore 40% open
- Top of support to top of floor = 7/16"