

RECESSED LIGHT

RL-14 12/08

(NON INSULATING)

QUESTIONS OR CONCERNS CONTACT CANARM AT:


1-800-265-1833 (English) 1-800-567-2513 (French) 1-800-267-4427 (USA) Monday through Friday 8:00 AM to 5:00 PM E.S.T.

"INSTRUCTIONS PERTAINING TO RISK OF FIRE OR INJURY TO PERSONS"

"READ ALL INSTRUCTIONS"

"IMPORTANT SAFETY INSTRUCTIONS" "SAVE THESE INSTRUCTIONS"

TOOLS AND MATERIALS REQUIRED:



Wiring supplies as required by electrical code




SAFETY PRECAUTIONS:

- 1. TURN OFF ELECTRICAL POWER BEFORE STARTING INSTALLATION OF LIGHT FIXTURE.
- 2. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
- 3. CAUTION RISK OF FIRE. CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.
- 4. KEEP INSULATION AT LEAST 3 INCHES AWAY FROM HOUSING. (FIG.5)
- 5. CONNECT THE GROUND WIRE (BARE COPPER OR GREEN) FROM YOUR FIXTURE TO THE GROUND WIRE (BARE COPPER OR GREEN) OR GROUND SCREW IN THE ELECTRICAL OUTLET BOX.

NOTE: Product May Not Look Exactly As Shown In Figures.


INSTALLATION:

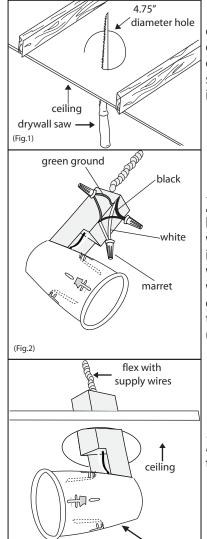

housing

(Fig.3)

- 1 o Using 4.75" template on the box, mark the openings and cut the openings with a drywall saw where you intend to install the lights. (Fig.1)
- 2. Pull wiring through hole cut out. Using the wire-nut, connect the incoming and outgoing wires by matching white to white, black to black and green to ground wire and twist on. (Fig.2)



- Push to lock the three remodel clips to hold the can against the ceiling. (Fig.4)
- 5. Do not install insulation within 76 mm (3 in) of any part of the luminaire. (Fig.5)
- 6்₀ Install the bulb.

3. Lift the housing onto the drywall. (Fig.3)