



# CEILING LIGHT

FM-6  
02/05

## QUESTIONS OR CONCERNS CONTACT CANARM AT:

1-800-265-1833 (English)

1-800-567-2513 (French)

Monday through Friday 8:00 AM to 5:00 PM E.S.T.

## TOOLS AND MATERIALS REQUIRED:



Blade  
Screwdriver



Wire Cutters

Wiring supplies  
as required by  
electrical code




Phillips  
Screwdriver

## SAFETY PRECAUTIONS:

1. **TURN OFF ELECTRICAL POWER BEFORE STARTING INSTALLATION OF LIGHT FIXTURE.**  
**DO NOT REMOVE INSULATION FROM FIXTURE.**
2. **THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.**
3. **CAUTION – RISK OF FIRE. CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.**

**NOTE: Product May Not Look Exactly As Shown In Figures.**


## INSTALLATION:

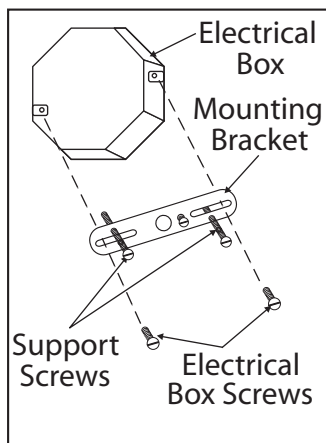


**1.** Install the mounting bracket to the electrical box using two electrical box screws. (Note: Do not adjust the two support screws at this time.)

**Note:** Your fixture may have either one or two sockets depending on the model.


**Note:** Step #2 may or may not be required.

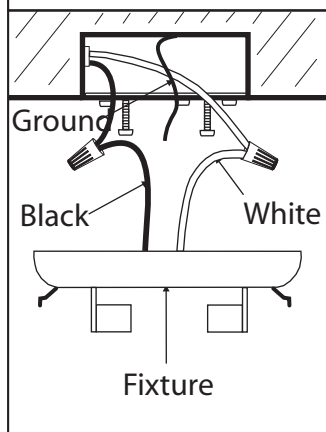

**2.** Connect the ground wire to the ground screw in the electrical box. Connect the black wire (or wire marked "SPT-1") from the fixture to the black wire in the electrical box and connect the white wire from the fixture to the white wire in the electrical box.

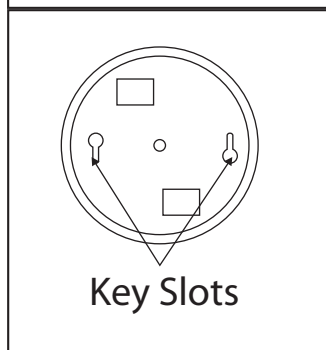

**3.** Tuck the electrical wires into the electrical box and position the "key slots" over the support screws. Turn and lock the support screws into the "key slots." Tighten the support screws into place.

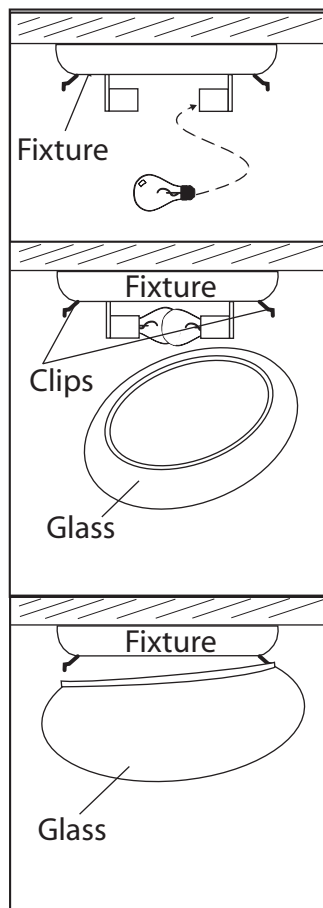

**4.** Install the proper bulb type and wattage.

**5.** Install glass shade by pulling the clip down and placing the glass globe over the clip.

**6.** Pull glass shade down on the clip (keep away from the fixture). Position second clip into the inside of the globe. Allow the glass globe to rest against the fixture.