

CEILING LIGHT


QUESTIONS OR CONCERNS CONTACT CANARM AT: 1-800-265-1833 (English) / 1-800-567-2513 (French) Monday through Friday 8:00 AM to 5:00 PM E.S.T.




SAFETY PRECAUTIONS:

- 1. TURN OFF ELECTRICAL POWER BEFORE STARTING INSTALLATION OF LIGHT FIXTURE. DO NOT REMOVE INSULATION FROM FIXTURE.
- 2. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
- 3. CAUTION RISK OF FIRE. CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.
- 4. CONNECT THE GROUND WIRE (BARE COPPER OR GREEN) FROM YOUR FIXTURE TO THE GROUND WIRE (BARE COPPER OR GREEN) OR GROUND SCREW IN THE ELECTRICAL OUTLET BOX.

INSTALLATION:

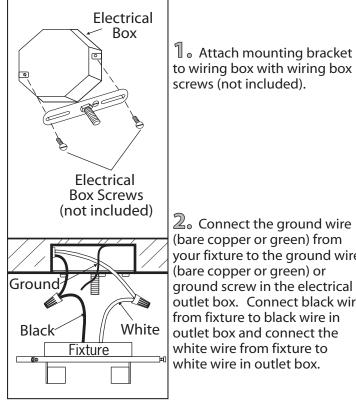

your fixture to the ground wire outlet box. Connect black wire

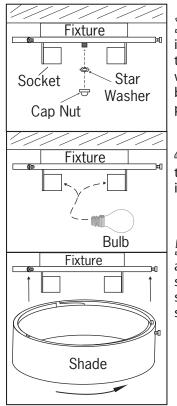

 \mathfrak{B}_{\circ} Tuck the electrical wires into the electrical box. Align the center hole in the fixture with the nipple in the mounting bracket. Secure the fixture in place with a cap nut.

IFM318A13

01/10

母。Install the proper bulb type and wattage (not included).

 5_{\circ} Push the shade upward and turn as shown. Lock the shade by tightening thumb screw against the fixture on the side.