

PENDANT LIGHT

QUESTIONS OR CONCERNS CONTACT CANARM AT:

1-800-265-1833 (English) 1-800-567-2513 (French) Monday through Friday 8:00 AM to 5:00 PM E.S.T.



"INSTRUCTIONS PERTAINING TO RISK OF FIRE OR INJURY TO PERSONS"
"READ ALL INSTRUCTIONS"

"IMPORTANT SAFETY INSTRUCTIONS"

"SAVE THESE INSTRUCTIONS"

TOOLS AND MATERIALS REQUIRED:



Blade Screwdriver



Wire Cutters



Wrench


Wiring supplies as required by electrical code

SAFETY PRECAUTIONS:

1. TURN OFF ELECTRICAL POWER BEFORE STARTING INSTALLATION OF LIGHT FIXTURE.
2. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
3. CONNECT THE GROUND WIRES (BARE COPPER OR GREEN) FROM YOUR FIXTURE TO THE GROUND WIRE (BARE COPPER OR GREEN) OR GROUND SCREW IN THE ELECTRICAL OUTLET BOX.


NOTE: Product May Not Look Exactly As Shown In Figures.

INSTALLATION: * Flush Mount Option May Not Be Applicable To Some Models.

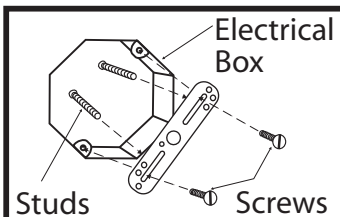


1. Install 2 studs into the two threaded holes in the mounting bracket. Attach mounting bracket to electrical box using electrical box screws (not included).

Flush Mount

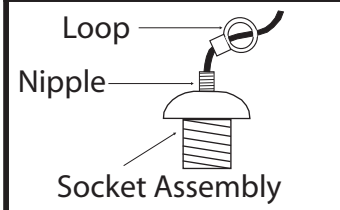


2. Remove the loop from the socket assembly.

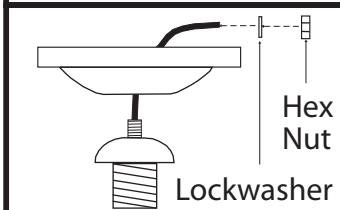


3. Place the canopy over the nipple on the socket assembly and secure in place with a lockwasher and hex nut. Proceed to step #5.

Suspended Mount

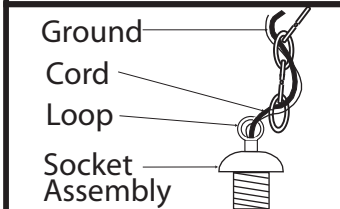


2. Hook the chain onto the loop of the socket assembly. Feed the cord and ground wire through every other link in the chain.

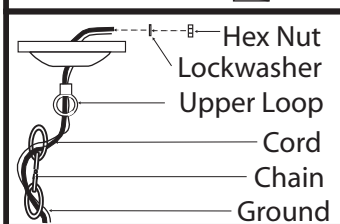


3. Hook the chain to the upper loop. Feed the cord and ground wire through the upper loop.


4. Connect the upper loop to the canopy using a lockwasher and hex nut.

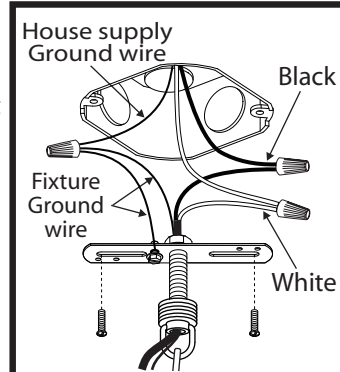

5. Connect the ground wires (bare copper or green) from your fixture to the ground wire (bare copper or green) or ground screw in the electrical outlet box. Connect the black wire (or wire marked "SPT-1") from the fixture to the black wire in the electrical box and connect the white wire from the fixture to the white wire in the electrical box.

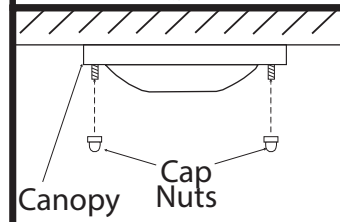


6. Tuck the wires into the electrical box. Align the (2) holes in the canopy with the (2) studs from the mounting bracket. Secure in place with (2) cap nuts.

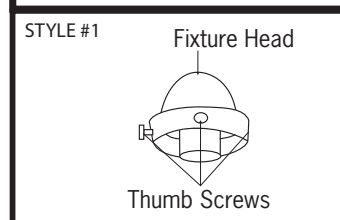

7. Remove the glass retaining nut from the socket. Position the glass on the socket assembly and secure with the glass retaining nut.


8. Mounting Glass To Fixture

NOTE: Refer to the style of assembly that matches the style of your fixture.

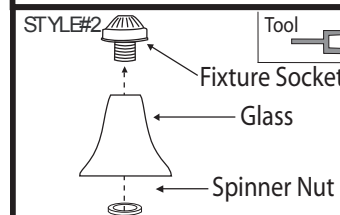

STYLE #1 - Using thumb screws provided, attach the glass to the fixture head. Place the glass into the fixture head and tighten screws into the groove or holes in the glass.

STYLE #2 - Remove spinner nut from socket. Position glass on lamp and secure with spinner nut. On some fixtures, a tool is included to attach the spinner nut.

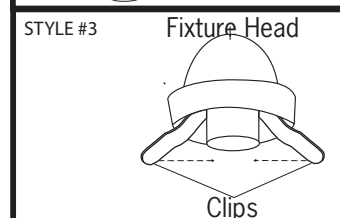

STYLE #3 - Squeeze the two clips together around the socket. Slide the glass over the clips, then push the glass up snug to the fixture head.

9. Install proper bulb type and wattage.