### electrical box screws (not included).

**EASY CONNECT®** 

INSTALLATION INSTRUCTIONS

**OUESTIONS OR CONCERNS CONTACT AT:** 1-800-265-1833 (English) • 1-800-567-2513 (French) Monday through Friday 8:00 AM to 5:00 PM E.S.T.

**CONNECT HOUSE WIRES** STEP 2 - Option 1 Connect (push) electrical (N)

Easy Connect


mounting

bracket

White

Green (Ground)

(Neutral)



## **CONNECT LIGHT FIXTURE** STEP 3

(N) (L) White Black (Neutral) (Live) Liaht ۲ Fixture Green (Ground)

Connect (push) electrical wires from fixture into correct inserts. Black (live), White (neutral), Green (ground)

wires from electric box


inserts. Black (Live),

White (Neutral),

Green (Ground)

(house wiring) into correct

# **STEP 4**



Tuck electrical wires into outlet box and position fixture over studs or nipple on mounting bracket assembly. Secure fixture in place with star washer(s) and cap nut(s). Note: If required, assemble body and spread the arms of the fixture out evenly.


## STEP 5

**STEP 1** 

Electrical

Box

Black (Live)




Remove spinner nut from socket. Position shade on lamp and secure with spinner nut.

# STEP 6

Bulb

Install proper bulb type and wattage (not included).


# **Option 2 - MULTIPLE ELECTRICAL BOX WIRES**



Black (Live)

For multiple black (live) & white (neutral) wires joined in the electrical box (house wiring), attach a single "black" and "white" Jumper Wire before connecting. Strip 7mm from a 6" Jumper Wires (AWG 12-24) supplied. Then connect (push) wires into correct inserts.

Æ

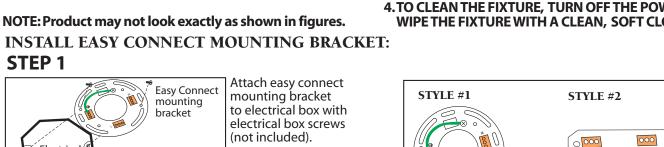



SAVE THESE INSTRUCTIONS



## 2. WIRING SUPPLIES AS REQUIRED BY LOCAL ELECTRICAL CODE. **3. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE**

APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS **INVOLVED.** 

4. TO CLEAN THE FIXTURE, TURN OFF THE POWER, WAIT FOR IT TO COOL, AND WIPE THE FIXTURE WITH A CLEAN, SOFT CLOTH.